



POINTS

- Immediately delivered, the all are standardized parts.
- Low price.
- Short Installation time.

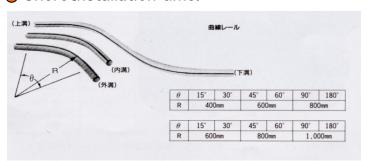



Main Specification

■Work weight Max.15kg (30kg/2points hang)

■ Transfer speed Max.6m/min.

Min.400mm turning radius ■ Vertical rail

■ Transfer pitch

■ Max. slope angle

■ Horizontal rail Min.400mm turning radius Upper than 152.1mm (* x 152.1mm) 60° (by Work weight limit) ■ Lubricator device ■Index device ■Turn device