



POINTS

- Immediately delivered, the all are standardized parts.
- Low price.
- Short Installation time.

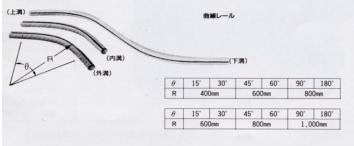



Main Specification ■Work weight Max.30kg (50kg/2points hang) ■Transfer speed Max.12m/min. ■ Vertical rail Min.600mm turning radius ■ Horizontal rail Min.600mm turning radius Upper than 200mm (* x 200mm) ■ Transfer pitch 60° (by Work weight limit) ■ Max. slope angle ■ Lubricator device ■Index device ■Turn device