

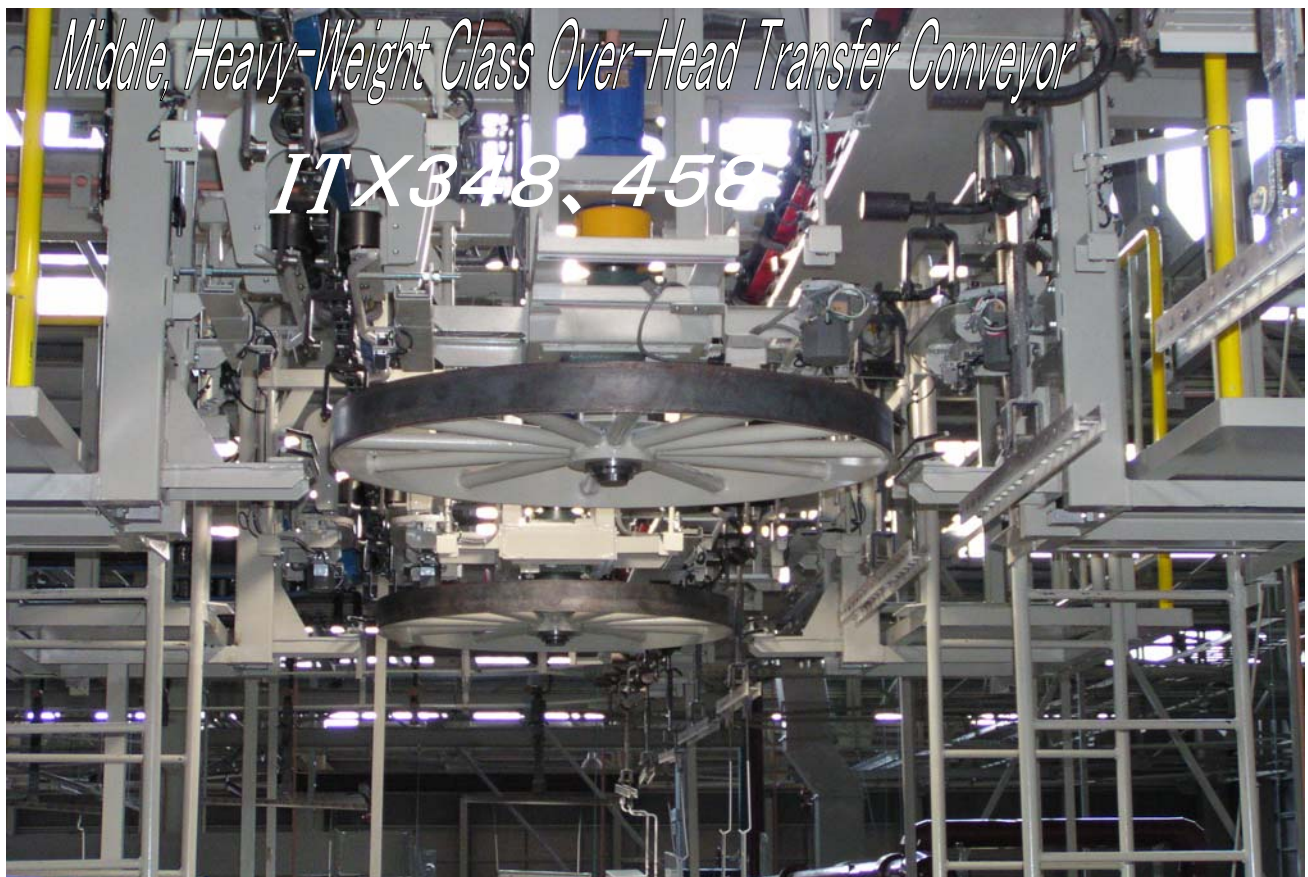


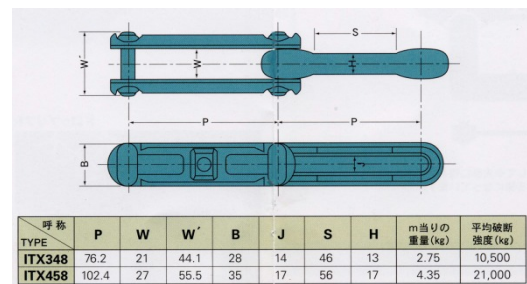

POINTS

- Immediately delivered, the all are standardized parts.
- Maintenance is easily possible.
- Choose the most suitable part. Average break strength from 10,500kg to 21,000kg.

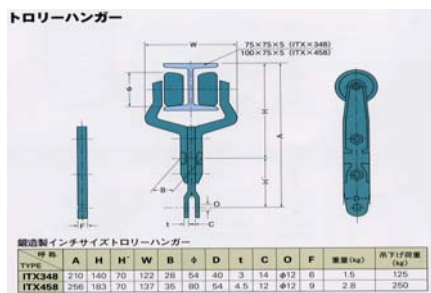

Main Specification

- Work weight ITX348 Max.125kg (200kg at 2 points hang)
ITX458 Max.250kg (400kg at 2 points hang)
- Transfer speed Max.12m/min.
- Vertical rail Min.1500mm(1800mm) turning radius
- Horizontal rail Min.600mm(800mm) diameter
- Transfer pitch Upper than 152.4mm (204.8mm)
- Max. slope angle 30 degree

■ Lubricator device

■ Index device

■ Turn device

■ Transfer device



ITX348



ITX458